


AM213 A / FLEX ADAPTER

2026-09-23 | units: mm

Fabricator review / first prototype - NOT an approved flex stack

TOP / component & contact face

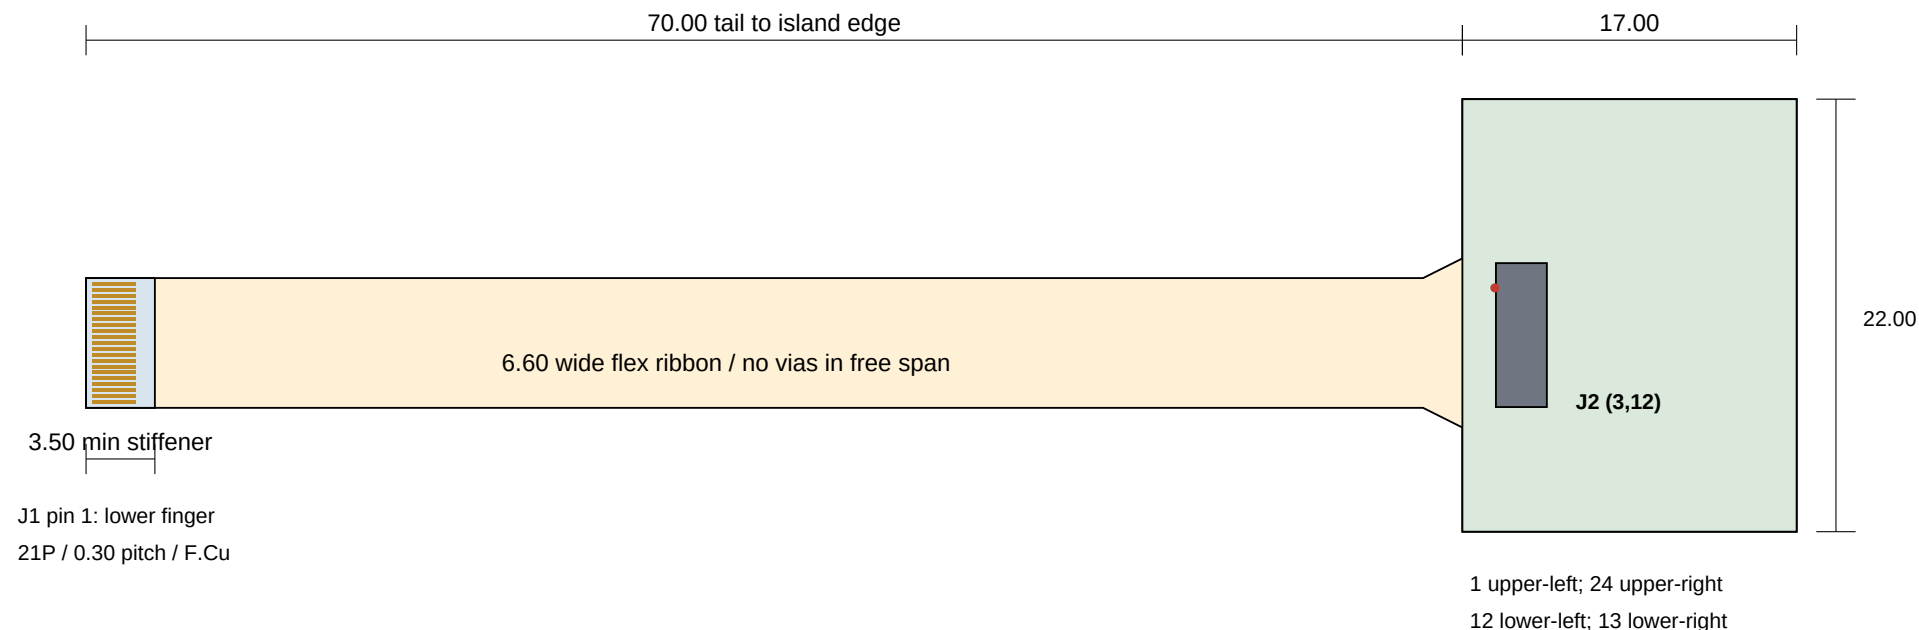

BACK-SIDE STIFFENERS (colored overlays; copper shown from top)

Blue: tip, $x=-70$ to -66.5 ; finished tip 0.20 ± 0.03 ; contact surface F.Cu.

Green: component island, $x=0..17$, $y=0..22$; flex + FR4 stiffener + adhesive ≤ 0.60 .

Flex body target 0.12 ; bending model $R0.8$. Fabricator must approve actual laminate and static bend.

FAB REQUIREMENTS

2 copper layers; minimum trace/space $0.10/0.10$; nominal signal trace 0.12 ; supply stripe 0.44 .

39 PTH: pad 0.40 / drill 0.20 ; 3 GND PTH: pad 0.30 / drill 0.15 ; min annular ring 0.075 .

Min drill-to-other-copper 0.175 ; copper-to-edge 0.15 . No blind/buried vias.

Review pad-adjacent / via-in-pad solder loss; agree plugging/covering process before production.

Confirm coverlay windows, connector finger drawing, plating and edge tolerances with AFE03 datasheet.

Root uses chamfered flare. Return any proposed fillet/teardrop changes for electrical/mechanical review.

Gerber + drill origin: island upper-left (KiCad 50,50). Do not clip negative-X ribbon.

See FABRICATION.md and BOM; R10/R11 DNP. Electrical ERC/DRC pass does not establish physical fit.